



APEX SEALING TECHNOLOGIES PTE LTD

TEST REPORT OF PRODUCTS

Report No. APEX_JGBG20132312-003

In- House test at Junguan Equipment Trading Company Limited, Shanghai
No.9405 Hutai High Way, Loujing Town, Baoshan district, Shanghai City

Tested by Mr. Le Jing Wei

Certified by

HQ - APEX Sealing Technologies Pte Ltd, Singapore

Endorsed by Mr. Marcus Lee

Approved by

Engineer



上海骏冠设备贸易有限公司
JUNGUAN EQUIPMENT TRADING CO., LTD. SHANGHAI

Approved by

Manager




APEX SEALING TECHNOLOGIES PTE LTD

Report No. APEX_JGBG20132312-003

Product Name: HOLDENFLEX Pipe Insulation Tape
Size: 300mm width & Thickness 25mm
Material: Ceramic Fibre Tape with aluminium layer
Tested Period: 23rd December 2013

Test Procedure - 1

We used in- house high temperature extrusion equipment. Calibrated to 500°C to heat up the mould.

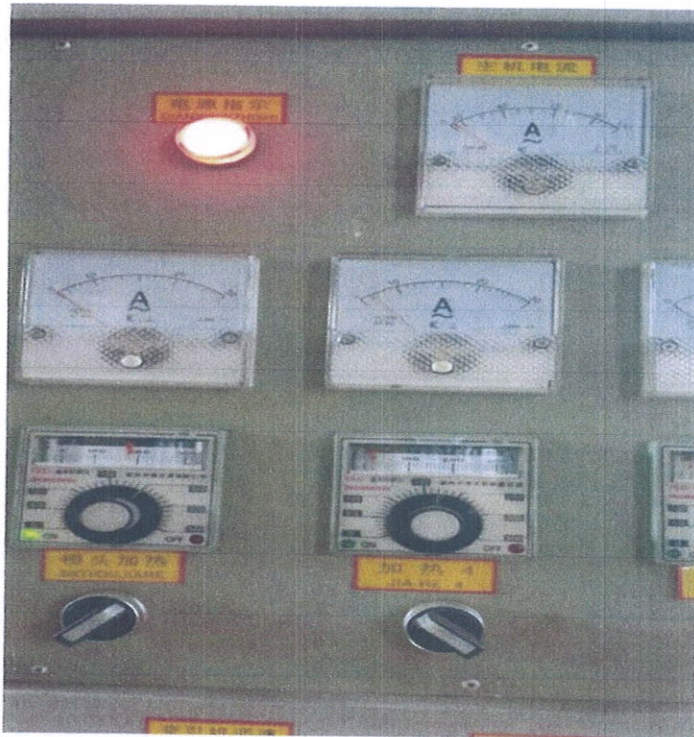

Approved by

Engineer



上海骏冠设备贸易有限公司
JUNGUAN EQUIPMENT TRADING CO., LTD. SHANGHAI

Approved by

Manager




APEX SEALING TECHNOLOGIES PTE LTD

Report No. APEX_JGBG20132312-003

Test Procedure - 2

Test started 1300 hours, after 1 hour 15 minutes, 378.8°C temperature was achieved. Reading detected by infrared thermometer.

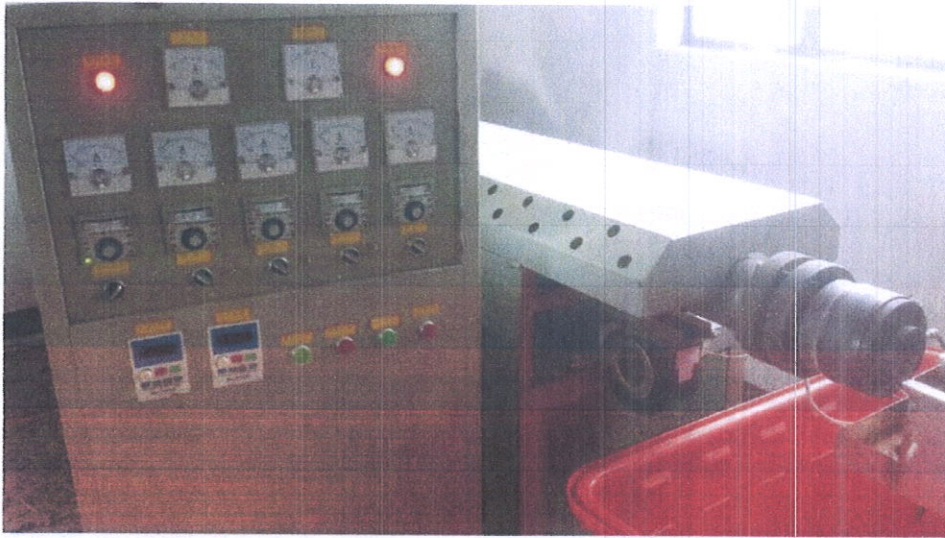

Test Procedure - 3

Infrared thermometer was then used again to detect new reading. Temperature shown 378.8°C
Steam was detected during this process.



Approved by *Allyson*
Engineer



上海骏冠设备贸易有限公司
JUNGUAN EQUIPMENT TRADING CO., LTD. SHANGHAI

Approved by *[Signature]*
Manager



APEX SEALING TECHNOLOGIES PTE LTD

Report No. APEX_JGBG20132312-003

Test Procedure - 4

After the wrapping process with the aluminium layered HOLDENFLEX insulating tape, the final reading showed a decline temperature of 46.9°C




Process was successfully conducted and achieved.

Without the special inspection seal from APEX, this report will be considered invalid. This report cannot be altered, amended, deleted, copied or use for duplication or advertisement without the permission from the authorised personnel and is subject to legal action.

The results shown herewith referred only to the sample (s) tested.

Approved by


Engineer



上海骏冠设备贸易有限公司
JUNGUAN EQUIPMENT TRADING CO., LTD. SHANGHAI

Approved by


Manager